

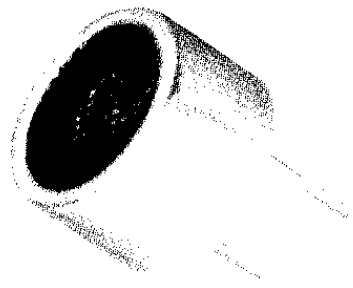



## QSC-12B SERIES

Model No	QSC-12B
Center Frequency	40 ± 2KHz
Free Capacitance	2500 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	6g




Color White  
Material: Housing: Plastic  
PC: Aluminum

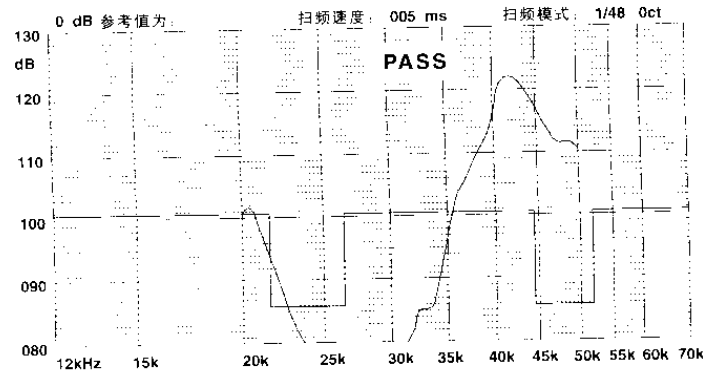




http://www.szdongbao.com

## QSC-16A SERIES

Model No	QSC-16A
Center Frequency	25 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g




Color White  
Material: Housing: Plastic  
PC: Aluminum

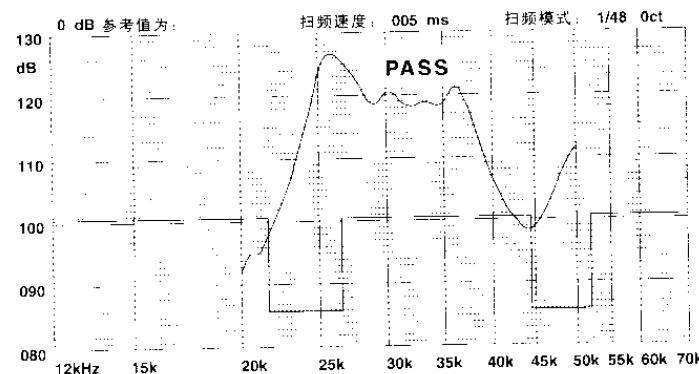




http://www.szdongbao.com

## QSC-16B SERIES

Model No	QSC-16B
Center Frequency	40 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g



Color White  
Material: Housing: Plastic  
PC: Aluminum

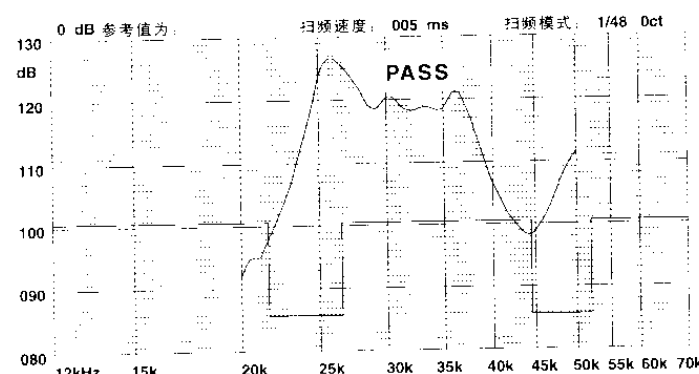

http://www.szdongbao.com